


GPX 14 Ø14 mm, planetary gearbox

GPX




Key Data		A Standard Version	C Ceramic Version
Max. transmittable power	W	4	4.8
Max. continuous torque	Nm	0.3	0.4
Max. continuous input speed	rpm	16000	16000
Ambient temperature	°C	-40 ... +100	-40 ... +100
Bearing at output		Ball bearing	Ball bearing

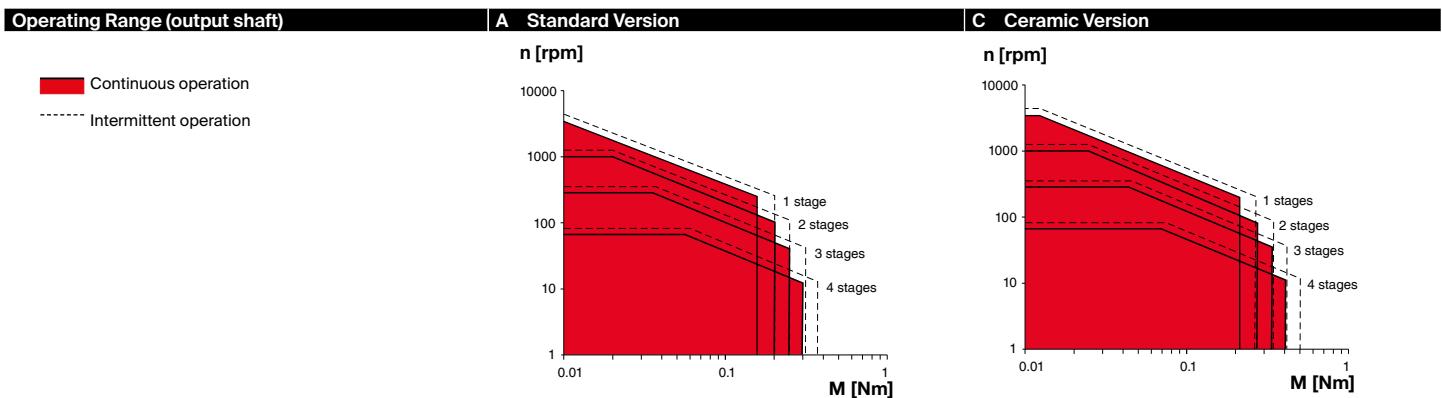

Specifications		A Standard Version	C Ceramic Version						
Number of stages		1	2	3	4	1	2	3	4
Max. transmittable continuous power	W	4.0	2.0	1.0	0.4	4.8	2.4	1.2	0.5
Max. transmittable intermittent power	W	5.0	2.5	1.25	0.5	6.0	3.0	1.50	0.6
Max. continuous torque	Nm	0.16	0.20	0.25	0.30	0.21	0.27	0.33	0.40
Max. intermittent torque	Nm	0.20	0.25	0.31	0.38	0.26	0.34	0.41	0.50
Max. continuous input speed	rpm	14000	16000	16000	16000	14000	16000	16000	16000
Max. intermittent input speed	rpm	17500	20000	20000	20000	17500	20000	20000	20000
Max. efficiency	%	90	80	75	65	90	80	75	65
Average backlash no load	°	1.1	1.3	1.45	1.7	1.1	1.3	1.45	1.7
Max. axial load (dynamic)	N	20	20	20	20	20	20	20	20
Max. radial load, 5 mm from flange	N	30	45	60	60	30	45	60	60
Gearhead length L1 ¹	mm	15.7	20.8	25.5	30.3	15.7	20.8	25.5	30.3
Weight	g	14	19	21	23	14	19	21	23

Configuration		A Standard Version	C Ceramic Version	
Number of stages		1	2	
Reduction	X:1	3.9, 5.3, 6.6 16, 21, 26, 28, 35	62, 83, 103, 111, 138, 150, 172, 186, 231	
Absolute reduction: (see online)		243, 326, 406, 439, 546, 590, 679, 734, 794, 913, 987, 1135, 1227, 1526		
Version	Standard/ceramic version/noise reduced/backlash reduced/high power			
Flange	Standard flange/configurable flange			
Shaft	Length/flat face			

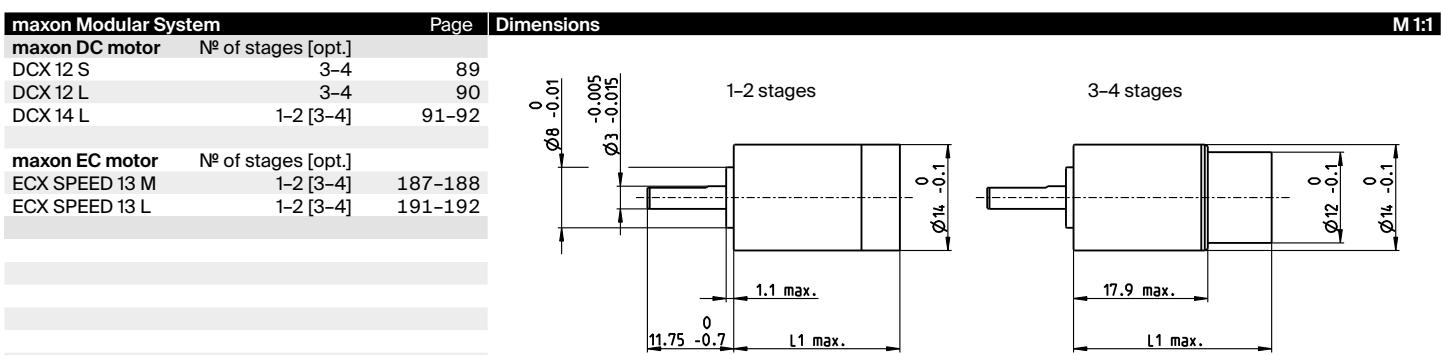

¹This length may vary depending on the configuration and choice of motor. The effective length is calculated at the end of the configuration process.

gpx.maxongroup.com